

- Single Supply or Dual Supplies
- Wide Range of Supply Voltage ... 2 V to 36 V
- Low Supply-Current Drain Independent of Supply Voltage . . . 0.4 mA Typ Per Comparator
- Low Input Bias Current . . . 25 nA Typ
- Low Input Offset Current . . . 3 nA Typ (LM193)
- Low Input Offset Voltage . . . 2 mV Typ
- Common-Mode Input Voltage Range Includes Ground
- Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . ±36 V
- Low Output Saturation Voltage
- Output Compatible With TTL, MOS, and CMOS

description

These devices consist of two independent voltage comparators that are designed to operate from a single power supply over a wide range of voltages. Operation from dual supplies also is possible as





NC - No internal connection

long as the difference between the two supplies is 2 V to 36 V, and V_{CC} is at least 1.5 V more positive than the input common-mode voltage. Current drain is independent of the supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

The LM193 is characterized for operation from –55°C to 125°C. The LM293 and LM293A are characterized for operation from –25°C to 85°C. The LM393 and LM393A are characterized for operation from 0°C to 70°C. The LM2903 and LM2903Q are characterized for operation from –40°C to 125°C and are manufactured to demanding automotive requirements.

symbol (each comparator)





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




AVAILABLE OPTIONS

		PACKAGED DEVICES								
TA	V _{IO(max}) AT 25°C	SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)	TSSOP (PW)				
0°C to 70°C	5 mV	LM393D	_	_	LM393P	LM393PW				
0-0 10 70-0	2 mV	LM393AD	_	_	LM393AP	_				
-25°C to 85°C	5 mV	LM293D	_	_	LM293P	_				
-25°C 10 85°C	2 mV	LM293AD	_	_	LM293AP	_				
-40°C to 125°C	7 m\/	LM2903D	_	_	LM2903P	LM2903PW				
-40°C to 125°C	7 mV	LM2903QD	_	_	LM2903QP	_				
–55°C to 125°C	5 mV	LM193D	LM193FK	LM193JG	_	_				

The D package also is available taped and reeled. Add the suffix R (e.g., LM393DR). The PW package is only available taped and reeled.

schematic (each comparator)

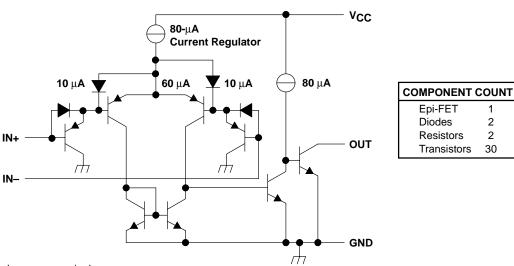

Current values shown are nominal.



absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V _{CC} (see Note 1)	
Differential input voltage, V _{ID} (see Note 2)	
Input voltage range, V _I (either input)	
Output voltage, VO	
Output current, Io	20 mA
Duration of output short-circuit to ground (see Note 3)	Unlimited
Continuous total power dissipation	. See Dissipation Rating Table
Package thermal impedance, θ_{JA} (see Note 4): D package	97°C/W
P package	85°C/W
PW package	149°C/W
Case temperature for 60 seconds: FK package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, P, or PW	package 260°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: JG package	300°C
Storage temperature range, T _{stq}	–65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to GND.
 - 2. Differential voltages are at IN+ with respect to IN-.
 - 3. Short circuits from outputs to $V_{\hbox{\scriptsize CC}}$ can cause excessive heating and eventual destruction.
 - 4. The package thermal impedance is calculated in accordance with JESD 51-7.

DISSIPATION RATING TABLE

PACKAGE	$T_{\mbox{A}} \le 25^{\circ}\mbox{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T _A	T _A = 70°C POWER RATING	T _A = 85°C POWER RATING	T _A = 125°C POWER RATING
FK	900 mW	11.0 mW/°C	68°C	880 mW	715 mW	275 mW
JG	900 mW	8.4 mW/°C	43°C	672 mW	546 mW	210 mW



LM193, LM293, LM293A, LM393 LM393A, LM2903, LM2903Q DUAL DIFFERENTIAL COMPARATORS

SLCS005H - JUNE 1976 - REVISED DECEMBER 2001

electrical characteristics at specified free-air temperature, $V_{CC} = 5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A †	LM193		LM293 LM393			UNIT		
					MIN	TYP	MAX	MIN	TYP	MAX		
\/. -	Input offset voltage	V _{CC} = 5 V to 30) V,	25°C		2	5		2	5	mV	
VIO	input onset voitage	$V_O = 1.4 \text{ V},$ $V_{IC} = V_{IC}(\text{min})$		Full range			9			9	IIIV	
lio.	Input offset current	V _O = 1.4 V		25°C		3	25		5	50	nA	
IIO	input onset current	VO = 1.4 V		Full range			100			250	IIA	
1	Input bias current	V= -14V		25°C		-25	-100		-25	-250	nA	
IB	input bias current	V _O = 1.4 V		Full range			-300			-400	IIA	
V	Common-mode			25°C	0 to V _{CC} -1.5			0 to V _{CC} -1.5			V	
VICR	input voltage range‡			Full range	0 to V _{CC} -2			0 to V _{CC} -2			V	
AVD	Large-signal differential voltage amplification	$V_{CC} = 15 \text{ V},$ $V_{O} = 1.4 \text{ V to 1}$ $R_{L} \ge 15 \text{ k}\Omega \text{ to V}$		25°C	50	200		50	200		V/mV	
lau	High-level	V _{OH} = 5 V,	V _{ID} = 1 V	25°C		0.1			0.1	50	nA	
ЮН	output current	V _{OH} = 30 V,	V _{ID} = 1 V	Full range			1			1	μΑ	
V	Low-level		V 4 V	25°C		150	400		150	400	mV	
VOL	output voltage	$I_{OL} = 4 \text{ mA},$	$V_{ID} = -1 V$	Full range			700			700	IIIV	
loL	Low-level output current	V _{OL} = 1.5 V,	V _{ID} = -1 V	25°C	6			6			mA	
laa	Cupply ourrant	D	V _{CC} = 5 V	25°C		0.8	1		8.0	1	mA	
ICC	Supply current	R _L = ∞	V _{CC} = 30 V	Full range			2.5			2.5	IIIA	

[†] Full range (MIN or MAX) for LM193 is –55°C to 125°C, for LM293 is 25°C to 85°C, and for LM393 is 0°C to 70°C. All characteristics are measured with zero common-mode input voltage, unless otherwise specified.



[‡] The voltage at either input or common-mode should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is V_{CC+} – 1.5 V, but either or both inputs can go to 30 V without damage.

electrical characteristics at specified free-air temperature, $V_{CC} = 5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CO	NDITIONS	T _A †	LM293A LM393A		LM2903 LM2903Q			UNIT		
					MIN	TYP	MAX	MIN	TYP	MAX		
V. 0	Input offset voltage	$V_{CC} = 5 \text{ V to } 30 \text{ V},$		25°C		1	2		2	7	mV	
VIO	input onset voltage	$V_O = 1.4 \text{ V},$ $V_{IC} = V_{IC}(\text{min})$		Full range			4			15	IIIV	
1,0	Input offset current	V _O = 1.4 V		25°C		5	50		5	50	nA	
lio	input onset current	VO = 1.4 V		Full range			150			200		
1.5	Input bias current	V _O = 1.4 V		25°C		-25	-250		-25	-250	250 nA	
IB	input bias current	VO = 1.4 V		Full range			-400			-500	IIA	
V:	Common-mode			25°C	0 to V _{CC} -1.5			0 to V _{CC} -1.5				
VICR	input voltage range‡			Full range	0 to V _{CC} -2			0 to V _{CC} -2			V	
AVD	Large-signal differential voltage amplification	$V_{CC} = 15 \text{ V},$ $V_{O} = 1.4 \text{ V to 1}$ $R_{L} \ge 15 \text{ k}\Omega \text{ to V}$		25°C	50	200		25	100		V/mV	
	High-level	V _{OH} = 5 V,	V _{ID} = 1 V	25°C		0.1	50		0.1	50	nA	
ЮН	output current	V _{OH} = 30 V,	V _{ID} = 1 V	Full range			1			1	μΑ	
\/	Low-level		\/ 4\/	25°C		150	400		150	400	mV	
VOL	output voltage	$I_{OL} = 4 \text{ mA},$	$V_{ID} = -1 V$	Full range			700			700	IIIV	
lOL	Low-level output current	V _{OL} = 1.5 V,	V _{ID} = -1 V	25°C	6			6			mA	
la a	Cumply ourrant	D.	V _{CC} = 5 V	25°C		0.8	1		0.8	1	A	
Icc	Supply current	R _L = ∞	V _{CC} = 30 V	Full range			2.5			2.5	mA	

[†] Full range (MIN or MAX) for LM293A is 25°C to 85°C, for LM393A is 0°C to 70°C, and for LM2903 and LM2903Q is –40°C to 125°C. All characteristics are measured with zero common-mode input voltage, unless otherwise specified.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$

PARAMETER	ONDITIONS	LM29 LM290	UNIT			
			MIN	TYP	MAX	
Response time	R_L connected to 5 V through 5.1 k Ω ,	100-mV input step with 5-mV overdrive	1.3			
	C _L = 15 pF§, See Note 5	TTL-level input step		0.3		μs

 $[\]$ C_L includes probe and jig capacitance.

NOTE 5: The response time specified is the interval between the input step function and the instant when the output crosses 1.4 V.



[‡] The voltage at either input or common-mode should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is V_{CC+} – 1.5 V, but either or both inputs can go to 30 V without damage.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third—party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments Post Office Box 655303 Dallas, Texas 75265